




Model: Solatube 330 DS-O Open Ceiling (21 in/530 mm Daylighting System)


Project: _____ Location: _____ Type: _____

Product Specifications Appear in CSI Division 08, Section 08 62 23. For budgeting and quotations use only. Qty: _____

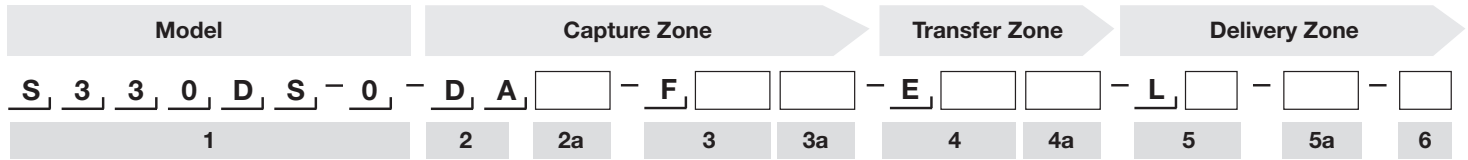

1 Model

330 DS-O SolaMaster® Solatube 330 DS-O (21 in/530 mm Daylighting System)
Open Ceiling



Capture Zone




2 Dome

DA Dome Acrylic

2a Dome Options (Leave blank if not desired)

- B** Security Bar
- PB** Dome Edge Protection Band
- SK** Dome Security Kit
- SS** Secondary Diffuser

3 Flashings

- F4** 4-inch Self Mounted 
- F8** 8-inch Self Mounted 
- F11** 11-inch Self Mounted 
- FC** Curb Cap (Curb by Others) 
- FSM** Metal Roof Flashing 

3a Flashings Options (Leave blank if not desired)

- T12*** Roof Flashing Turret Extension 12 in/300 mm
- T24*** Roof Flashing Turret Extension 24 in/600 mm
- T36*** Roof Flashing Turret Extension 36 in/900 mm
- T48*** Roof Flashing Turret Extension 48 in/1200 mm
- FI** Flashing Insulator


* Specify additional extension tubes in #4

Transfer Zone

4 Extension Tubes Required*

Run measured from top of flashing to diffuser along centerline of tubing (allow for 2" overlap)

- | | |
|---|--|
| E1** One Extension Tube – Max Run = 24" | E7** Seven Extension Tubes – Max Run = 156" |
| E2** Two Extension Tubes – Max Run = 46" | E8** Eight Extension Tubes – Max Run = 178" |
| E3** Three Extension Tubes – Max Run = 68" | E9** Nine Extension Tubes – Max Run = 200" |
| E4** Four Extension Tubes – Max Run = 90" | E10** Ten Extension Tubes – Max Run = 222" |
| E5** Five Extension Tubes – Max Run = 112" | EXX** Total Run Length to be Determined by Bidding Contractor |
| E6** Six Extension Tubes – Max Run = 134" | |



*At least one 24" extension tube required for diffuser

**Compatible with dome ring to be used as a top tube or extension tube

***Total tube run will vary depending on flashing used

4a Options (Leave blank if not desired)

- | | |
|---|--|
| A1 One 0-90 Degree Extension Tube (Angle Adapter) | AK 16" Top Tube Angle Adapter and 16" Bottom Tube Angle Adapter |
| A2 Two 0-90 Degree Extension Tubes (Angle Adapter) | TA 16" Top Tube Angle Adapter |
| E Wire Suspension Kit (50 ft.) | R Trim Ring |

Delivery Zone

5 Diffuser Lens

- | | |
|--|--|
| L1 OptiView® Diffuser  | L2 Prismatic Diffuser  |
|--|--|

5a Options (Leave blank if not desired)

- D** Daylight Dimmer™

6 Measurement Standard

- M** Metric **I** Imperial

Accessories (Order separately.)

- SW** Low voltage switch (white) required to operate Solatube Daylight Dimmers. Note: Only one switch is required per ten (10) synchronously controlled dimmers.
- CA** Two Conductor Low Voltage Cable (500 ft.)

Example

330 DS-O-DA-F8-E2-L1-D-M

SolaMaster Series® 330 DS-O (21 in/530 mm Daylighting System), Acrylic Dome, 8-inch High Self Mounted Flashing, Two Extension Tubes, OptiView® Diffuser and Daylight Dimmer. For metric installations.